

KI-AXZ100LM20A-TS


Explosion Proof



- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

سایر برتری ها

- بدنه ضد آب و گرد و غبار با درجه IP68
- بدنه ضد ضربه با استاندارد IK10
- ضد انفجار
- جنس بدنه از استیل
- جنس پایه از استیل ۳۰۴ یا ۳۱۶
- جنس شیشه از کوارتز مقاوم در برابر دما
- پشتیبانی از H.264 / H.265/MJPEG
- پشتیبانی از ONVIF
- قابلیت WDR, BLC, HLC, Defog
- کیس این محصول بدون ماژول نیز قابل سفارش می باشد.

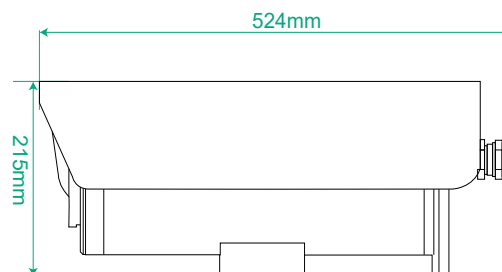

Camera	
Image Sensor	2MP Progressive scan Cmos Sensor (1/2.7")
Lens Mount	N/A
Lens	2.8~12 mm Motorized
Resolution	1920x1080 (2MP)
Angle of View	H-FOV: 112°~28°, V-FOV: 60°~15°, D-FOV: 146°~33°
Available IR Range	N/A
D/N Filter	IR Cut Filter Switch (ICR)
Min illumination	Color: 0.01 Lux(AGC on) - B/W: 0.0 Lux(F1.6, AGC ON)
Night Vision	Color / IR
Picture Adjust	
Picture Function	120dB WDR, BLC, HLC, ROI, 2D/3D DNR
Shutter Speed	Manual (1/3 ~ 1/100.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.265, H.264, MJPEG
Audio Compression	G.711A, G.722.1, G.722.2, MP2L2
Frame Rate(60Hz)	30fps@(1920x1080), 30fps@(1280x960), 30fps@(1280x720)
Transmission Stream	Triple Stream (Code Rate: 32kbps-8mbps)
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS
Compatibility	Onvif Ver2.6, Profile S, G, T, CGI, SDK, API
Web Viewer	Multi Browser
Function	
Recording	FTP, NVR, CMS
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection
Event Action	N/A
Intelligent Function	N/A

Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
Audio	1 x Audio Out, 1 x Audio In (Optional)
Alarm	1 x Alarm Out, 2 x Alarm In (Optional)
CVBS	YES (Optional)
Power	PoE LAN / Power IN
Control	1 x RS485 (Optional)
Memory Slot	Yes - Micro SD Slot (256 Gb Max) (Optional)
Camera Housing Box	
Type	Explosion Proof
IP Rating	IP68, IK10, EX Protection, 6KV Surge Protection
Housing	Stainless Steel 304 (optional 316L)
Cooling Water	N/A
Cooling Air	N/A
Sun-Shield	YES / (Optional)
Bracket	YES / Stainless Steel 304 / 2.5 Kg / Wall or poll
EX Flexible Tube	YES / Explosion Proof Cable / 1500 mm
EX Cable Gland	YES / Explosion Proof Cable Gland
General	
Power Supply	DC24V, AC24V, AC220V
POE Supply	IEEE802.3bt-Max 60 Watt
Web Language	English
Dimension	524*215 mm
Package Weight	12.5 kg
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-48°C ~ +60°C
Certificate Of Case	
Certificate Mark	EX IIC T6 GB / EXT D A21 IP68 T80°C
Certificate Number	CNEx16-2708
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	100K hrs min- MIL-HDBK-217F (25°)